

# Model 122 Button Programming

Press Menu Button, then Enter Button



Up Arrow Key



Enter Key

Press Menu Button to return to Run Mode



SEtuP



InPut SEtuP



totAL InPut



yES totAL



no totAL

Activates Total display: Use ^ then hit Enter when your choice is displayed



unitS SEtuP



rAtE unitS



totAL unitS



GtotAL unitS

Then use ^ to change highlighted character, Use > to increment to next

Then use ^ to change highlighted character, Use > to increment to next

Then use ^ to change highlighted character, Use > to increment to next

Move down



dEc Pt SEtuP



rAtE dEc Pt



totAL dEc Pt



GtotAL dEc Pt

Use ^ to change decimal place location. Does not change the K-Factor Value

Use ^ to change decimal place

Use ^ to change decimal place

Move down



ProG SEtuP



InCAL ProG



Factor InCAL



SCALE



CAL

Do not use Scale or Cal

Use ^ to change the decimal place location of the K-Factor, then use enter to access the K-Factor screen. Use the ^ key to change the value and the > key to move to the next digit (hitting "Enter" will store value)



t tb ProG



t CF Prog



t rSt ProG



Repeat for Grand total

Use ^ to select Time base


Enter decimal place, then value for ratio of Rate

Use ^ to select manual or auto reset of

Move down



## Model 122 Button Programming

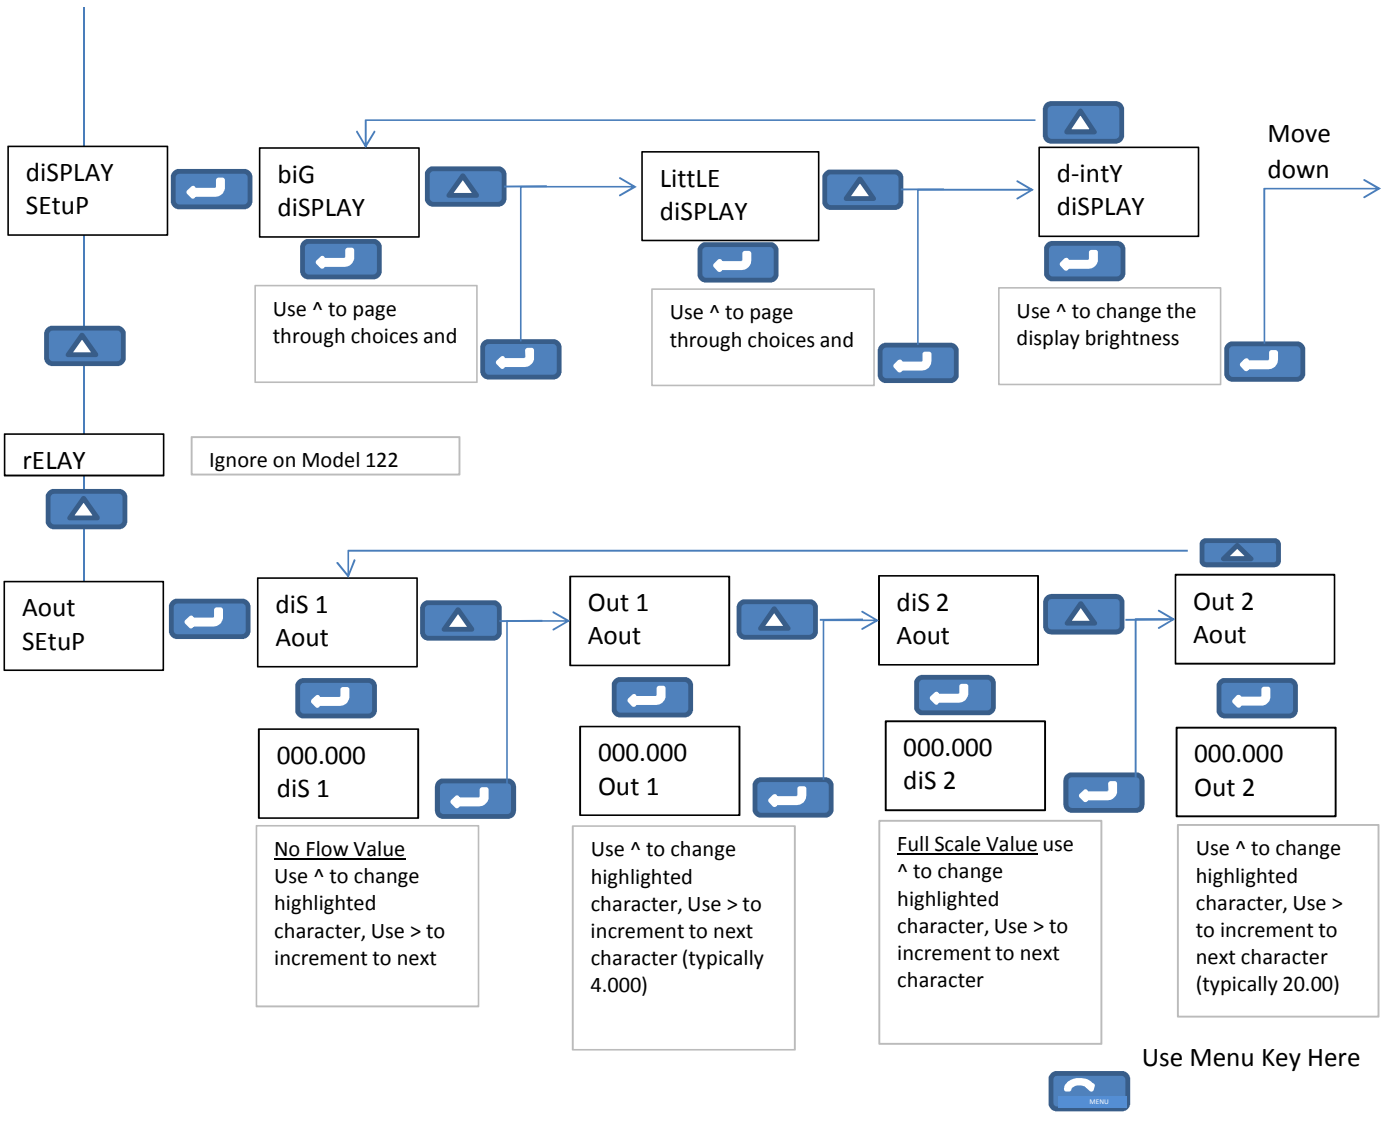

### INCREASE DISPLAY STABILITY

Press and hold Menu Button for 3 seconds

